


### Features

- Ultra low leakage: nA level
- Operating voltage: 15V
- Low clamping voltage
- Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test
    - Air discharge:  $\pm 30\text{kV}$
    - Contact discharge:  $\pm 30\text{kV}$
  - IEC61000-4-4 (EFT) 40A (5/50ns)
  - IEC61000-4-5 (Lightning) 8A (8/20 $\mu\text{s}$ )
- RoHS Compliant

### Dimensions SOD-523



### Pin Configuration



### Applications

- USB 2.0 power and data line
- Set-top box and digital TV
- Digital video interface (DVI)
- Notebook Computers
- SIM Ports
- 10/100 Ethernet

### Mechanical Characteristics

- Package: SOD-523
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel: 3,000pcs
- Reel Size: 7 inch


### Absolute Maximum Ratings (T<sub>amb</sub>=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 $\mu\text{s}$ )	P <sub>pp</sub>	280	W
ESD per IEC 61000-4-2 (Air)	V <sub>ESD</sub>	$\pm 30$	Kv
ESD per IEC 61000-4-2 (Contact)		$\pm 30$	
Operating Temperature Range	T <sub>J</sub>	-55 to +125	°C
Storage Temperature Range	T <sub>STJ</sub>	-55 to +150	°C


## Electrical Characteristics (TA=25°C unless otherwise specified)

Part Number	Device Marking	V <sub>RWM</sub> (V)	V <sub>BR</sub> (V)	I <sub>T</sub> (mA)	V <sub>C</sub> @1A	V <sub>C</sub>		I <sub>R</sub> μA (Max)	C (Pf) (Typ.)
						(Max)	(@A)		
SDA15T1	E75	15	16	1	22	35	8	1	35


## Typical Performance Characteristics (TA=25°C unless otherwise Specified)

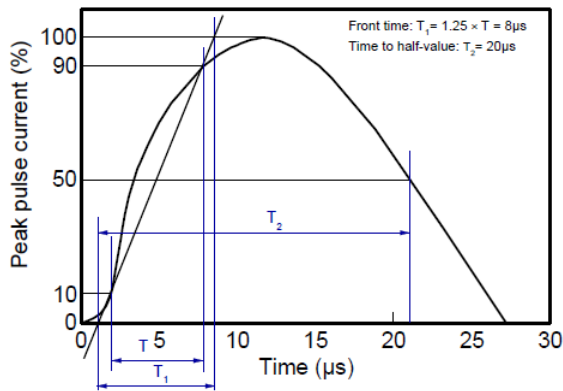


8/20µs waveform per IEC61000-4-5

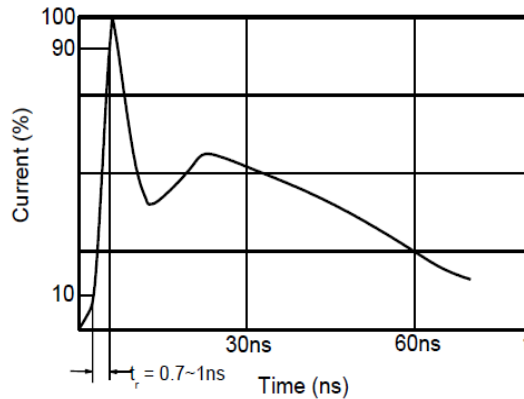

Contact discharge current waveform per IEC61000-4-2

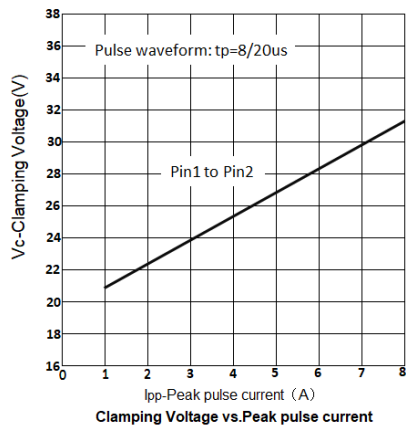

Clamping Voltage vs. Peak pulse current

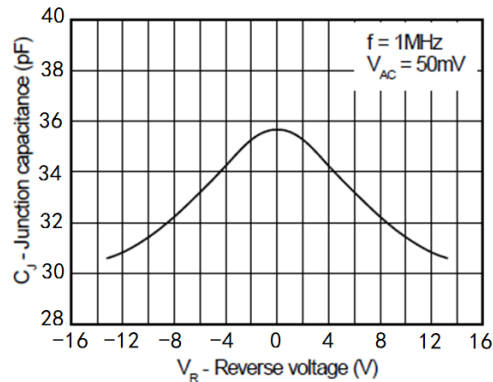

Capacitance vs. Reverse voltage

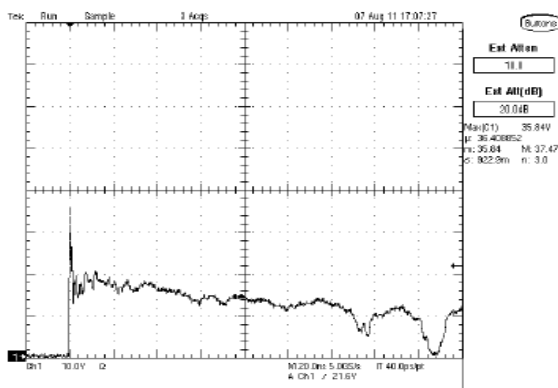


Fig1. ESD Clamping Voltage Screenshot Positive 8 kV Contact per IEC61000-4-2


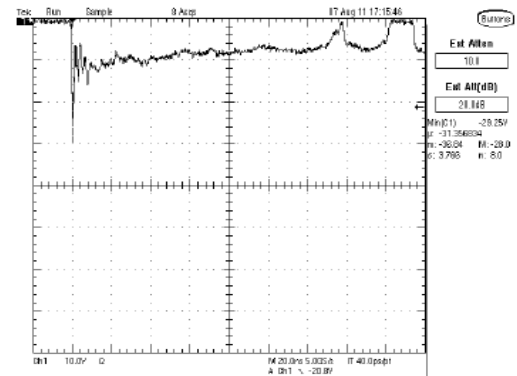


Fig2. ESD Clamping Voltage Screenshot Negative 8 kV Contact per IEC61000-4-2

## SOD-523 Package Outline & Dimensions

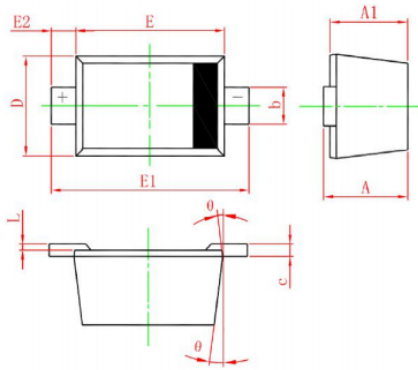

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.51	-	0.77	0.020	-	0.031
A1	0.50	-	0.70	0.020	-	0.028
b	0.25	-	0.35	0.010	-	0.014
c	0.08	-	0.15	0.003	-	0.006
D	0.75	-	0.85	0.030	-	0.033
E	1.10	-	1.30	0.043	-	0.051
E1	1.50	-	1.70	0.059	-	0.067
E2	0.20REF			0.008REF		
L	0.01	-	0.07	0.001	-	0.003
Φ	7° REF			7° REF		