


DESCRIPTION:

SM8S Series TVS diodes can be used in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

FEATURES:

- ✧ Available in uni/bi-directional polarity.
- ✧ Low forward voltage drop & Low leakage current.
- ✧ High surge capability.
- ✧ Junction passivation optimized design passivated anisotropic rectifier technology.
- ✧ $T_J = 175\text{ }^\circ\text{C}$ capability suitable for high reliability and automotive requirement.
- ✧ Meets ISO7637-2 surge specification (varied by test condition).
- ✧ Meets MSL level 1, per J-STD-020, LF maximum peak of $245\text{ }^\circ\text{C}$.
- ✧ AEC-Q101 qualified.
- ✧ Compliant to ROHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

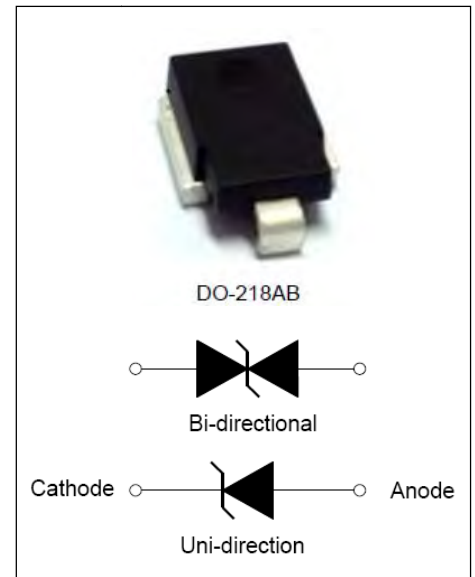

ABSOLUTE MAXIMUM RATINGS ($T_C=25\text{ }^\circ\text{C}$, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak pulse power dissipation on 10/1000us waveform	P_{pp}	6600	Watts
Peak pulse power dissipation on 10/10000us waveform		5200	Watts
Peak pulse current with 10/1000us waveform	I_{pp}	See next table	Amps
Power dissipation on infinite heat Sink at $T_C=25\text{ }^\circ\text{C}$	P_D	8.0	Watts
Peak forward surge current, 8.3ms single half sine-wave	I_{FSM}	700	Amps
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +175	$^\circ\text{C}$
Typical thermal resistance, junction to case	$R_{\theta JC}$	0.9	$^\circ\text{C/Watt}$

ELECTRICAL CHARACTERISTICS

Part Number		V _R	I _R @V _R		V _{BR} @ I _T		I _T	V _c @ I _{pp}	I _{pp}
Uni-polar	Bi-polar	V	μA@25°C	μA@175°C	min(V)	max (V)	mA	V	A
SM8S10A	SM8S10CA	10.0	10	150	11.1	12.3	5	17.0	388
SM8S11A	SM8S11CA	11.0	10	150	12.2	13.5	5	18.2	363
SM8S12A	SM8S12CA	12.0	10	150	13.3	14.7	5	19.9	332
SM8S13A	SM8S13CA	13.0	10	150	14.4	15.9	5	21.5	307
SM8S14A	SM8S14CA	14.0	10	150	15.6	17.2	5	23.2	284
SM8S15A	SM8S15CA	15.0	10	150	16.7	18.5	5	24.4	270
SM8S16A	SM8S16CA	16.0	10	150	17.8	19.7	5	26.0	253
SM8S17A	SM8S17CA	17.0	10	150	18.9	20.9	5	27.6	239
SM8S18A	SM8S18CA	18.0	10	150	20.0	22.1	5	29.2	226
SM8S20A	SM8S20CA	20.0	10	150	22.2	24.5	5	32.4	204
SM8S22A	SM8S22CA	22.0	10	150	24.4	26.9	5	35.5	186
SM8S24A	SM8S24CA	24.0	10	150	26.7	29.5	5	38.9	170
SM8S26A	SM8S26CA	26.0	10	150	28.9	31.9	5	42.1	157
SM8S28A	SM8S28CA	28.0	10	150	31.1	34.4	5	45.4	145
SM8S30A	SM8S30CA	30.0	10	150	33.3	36.8	5	48.4	136
SM8S32A	SM8S32CA	32.0	10	150	35.5	39.4	5	51.4	128.5
SM8S33A	SM8S33CA	33.0	10	150	36.7	40.6	5	53.3	124
SM8S36A	SM8S36CA	36.0	10	150	40.0	44.2	5	58.1	114
SM8S40A	SM8S40CA	40.0	10	150	44.4	49.1	5	64.5	102
SM8S43A	SM8S43CA	43.0	10	150	47.8	52.8	5	69.4	95.1

Part Number		V_R	$I_R @ V_R$		$V_{BR} @ I_T$		I_T	$V_C @ I_{pp}$	I_{pp}
Uni-polar	Bi-polar	V	$\mu A @ 25^\circ C$	$\mu A @ 175^\circ C$	min(V)	max (V)	mA	V	A
SM8S45A	SM8S45CA	45.0	10	150	50.0	55.3	5	72.7	90.8
SM8S48A	SM8S48CA	48.0	10	150	53.3	58.9	5	77.4	85.3
SM8S51A	SM8S51CA	51.0	10	150	56.7	62.7	5	82.4	80.1
SM8S54A	SM8S54CA	54.0	10	150	60.0	66.3	5	87.1	75.8
SM8S58A	SM8S58CA	58.0	10	150	64.4	71.2	5	93.6	70.5
SM8S60A	SM8S60CA	60.0	10	150	66.7	73.7	5	96.8	68.2
SM8S64A	SM8S64CA	64.0	10	150	71.1	78.6	5	103	64.1
SM8S70A	SM8S70CA	70.0	10	150	77.8	86.0	5	113	58.4
SM8S75A	SM8S75CA	75.0	10	150	83.3	92.1	5	121	54.5
SM8S78A	SM8S78CA	78.0	10	150	86.7	95.8	5	126	52.4
SM8S85A	SM8S85CA	85.0	10	150	94.4	104.0	5	137	48.2

Note:

①. For all types maximum $V_F = 1.8$ V at $I_F = 100$ A measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum.

②. Surge waveform: 10/1000 μ s

V_R : Stand-off Voltage -- Maximum voltage that can be applied

V_{BR} : Breakdown Voltage

V_C : Clamping Voltage -- Peak voltage measured across the suppressor at a specified I_{pp}

I_R : Reverse Leakage Current

I_T : Test current

Mechanical Data


CASE: DO-218AB Molding compound meets UL 94V-0 flammability rating Base

P/NHE3-ROHS-compliant, AEC-Q101 qualified.

Terminals: Matte tin plated leads, solder able per J-STD-002 and JESD 22-B102,

HE3 suffix meets JESD 201 class 2 whisker tests.

ORDERING INFORMATION

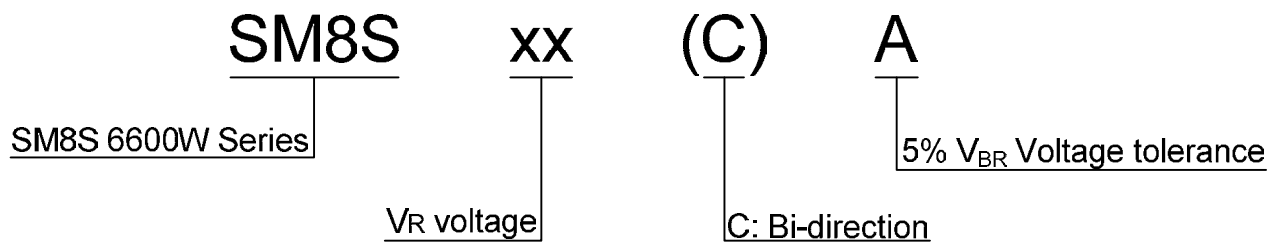

RATINGS AND CHARACTERISTICS CURVES ($T_A=25^\circ\text{C}$, unless otherwise noted)

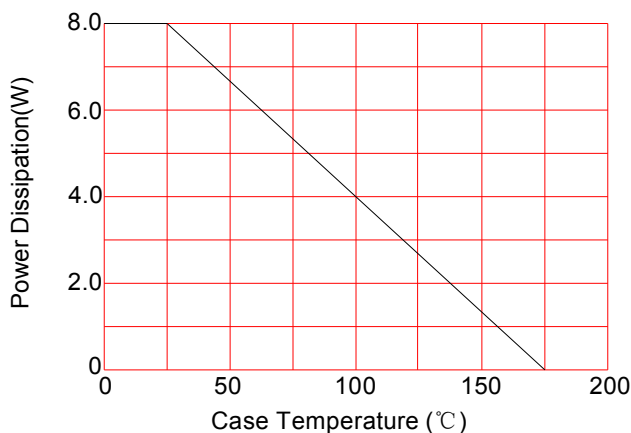


FIG.1: Power Derating Curve

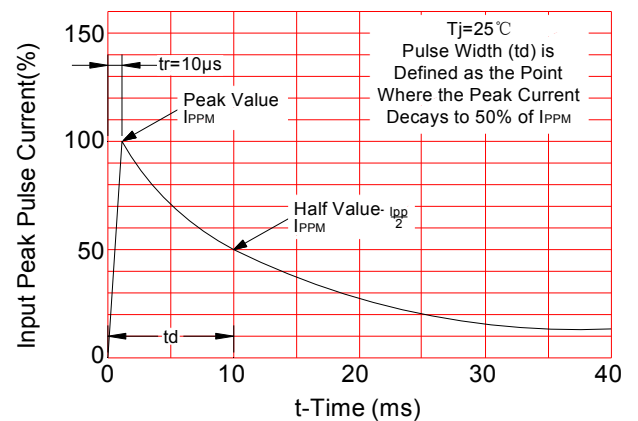


FIG.2: Pulse Waveform

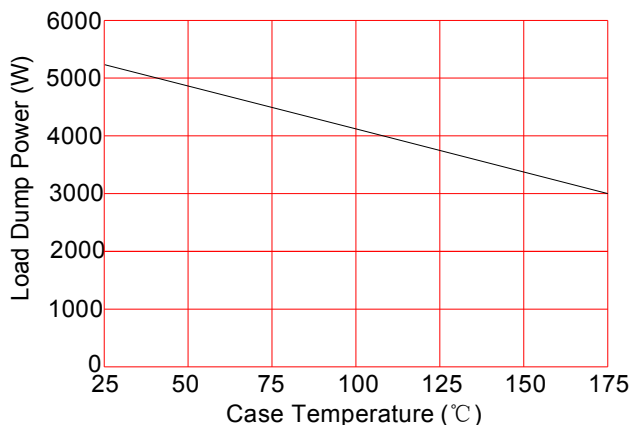


FIG.3: Load Dump Power Characteristics (10ms Exponential Wavaform)

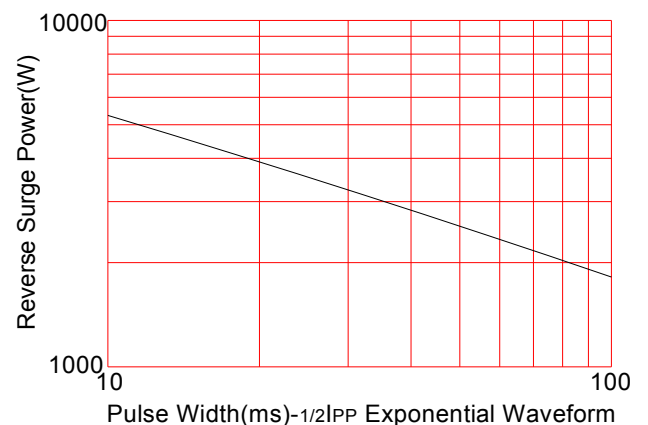


FIG.4: Reverse Power Capability

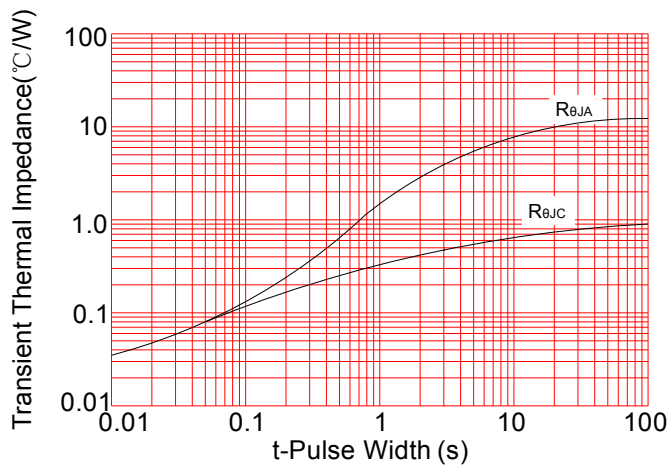


FIG.5: Typical Transient Thermal Impedance


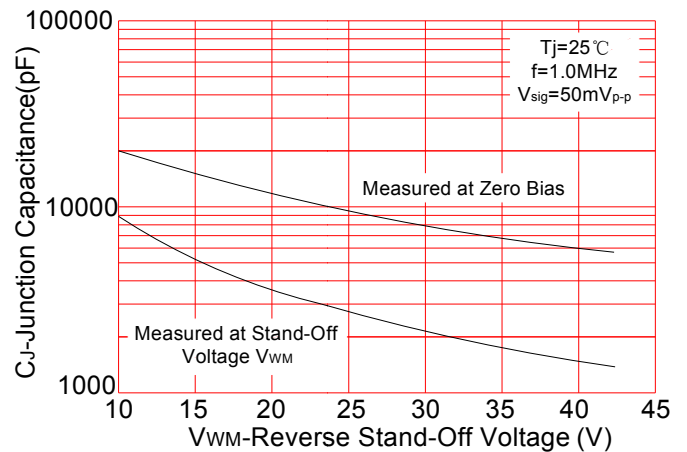



FIG.6: Typical Junction Capacitance

SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see FIG.5)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (t_s)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_p)		8 min. Max
Do not exceed		+260°C

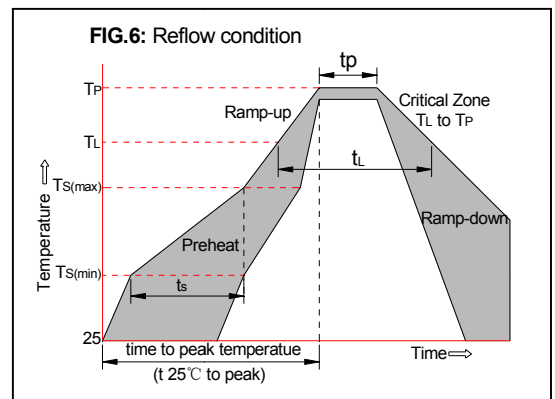


PACKAGE MECHANICAL DATA

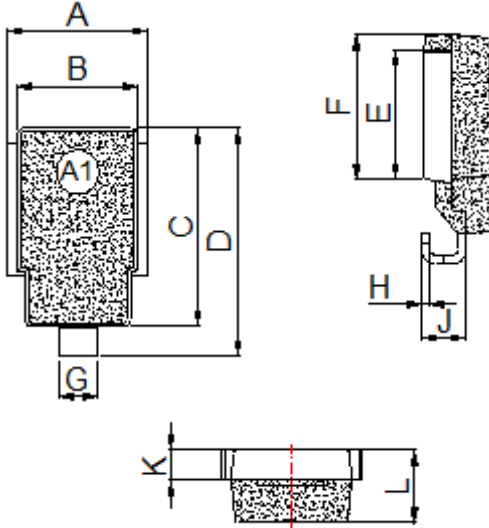

Dimension	Inches		Millimeters	
	Min	Max	Min	Max
A	0.374	0.413	9.5	10.5
B	0.327	0.342	8.3	8.7
C	0.524	0.539	13.3	13.7
D	0.592	0.628	15.0	16.0
E	0.335	0.358	8.5	9.1
F	0.374	0.398	9.5	10.1
G	0.094	0.118	2.4	3.0
H	0.020	0.028	0.5	0.7
J	0.106	0.146	2.7	3.7
K	0.075	0.083	1.9	2.1
L	0.185	0.201	4.7	5.1

TAPE AND REEL SPECIFICATION-DO-218AB


Spec No: _____

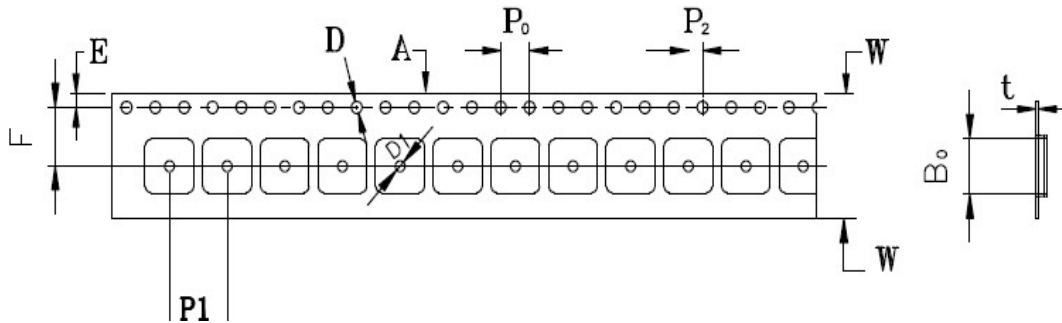

ITEM	W	A0	B0	K0	K1	P1	E	F	D	D1	P0	P2	T
DIM	24mm	10.8mm	16.13mm	5.21mm	3.9mm	16mm	1.75mm	11.5mm	1.55mm	1.55mm	4.0mm	2.0mm	0.4mm
TOL	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

Note:

- 10 pocket holes pitch cumulative tolerance ± 0.20 mm.
- Carrier camber is 1mm in 100mm.
- A0 and B0 are measured on a plane 0.30mm above the bottom of the pocket.
- K0 is measured from a plane on the inside bottom of the pocket to the top surface of the pocket.
- All dimensions meet EIA-481-2-A requirements.
- Packing length per 22" Reel: 205Meters.

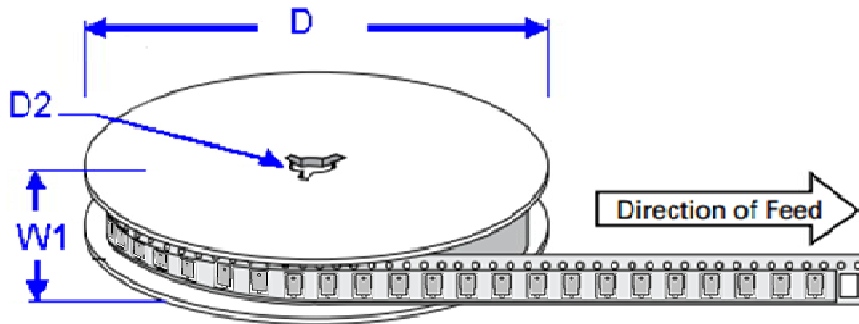

Dimensions	millimeters	inches
D	330 ± 0.2	13.0 ± 0.008
D2	13.2 ± 0.2	0.52 ± 0.008
W1	24 ± 0.2	0.94 ± 0.008

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)
TAPING	750	3000	330

NOTICE

Leiditech reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Leiditech does not assume any liability arising out of the application or use of any product described herein.