

### DESCRIPTION:

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.

### FEATURES:

- ✧ Glass passivated or planar junction
- ✧ Excellent clamping capability
- ✧ Repetition rate (duty cycle): 0.01%
- ✧ Typical  $I_R$  less than  $1\mu A$  above 10V.
- ✧ Low profile package and low inductance
- ✧ 600W Peak Pulse power capability at  $10\times 1000\mu s$  waveform.
- ✧ Fast response time: typically less than 1.0ps from 0V to  $V_{BR}$  min.
- ✧ High temperature soldering:  $260^\circ C/10s$  at terminals.
- ✧ Plastic package has Underwriters Laboratory Flammability 94V-0.
- ✧ For surface mounted applications in order to optimize board space
- ✧ AEC-Q101 qualified.



SMB



Bi-directional



Uni-directional

Symbol

### ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ C$ , RH=45%-75%, unless otherwise noted)

| Parameter  | Symbol      | Value       | Unit       |
|--|-------------|-------------|------------|
| Storage temperature range                                | $T_{stg}$   | -55 to +150 | $^\circ C$ |
| Operating junction temperature range                     | $T_j$       | -55 to +150 | $^\circ C$ |
| Steady state power dissipation at $T_L=75^\circ C$       | $P_{M(AV)}$ | 5.0         | W          |
| Peak pulse power dissipation on 10/1000 $\mu s$ waveform | $P_{PP}$    | 600         | W          |

### ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C)

| Part Number |             | V <sub>R</sub> | I <sub>R</sub> @V <sub>R</sub> | V <sub>BR</sub> @I <sub>T</sub> |        | I <sub>T</sub> | V <sub>C</sub> @I <sub>PP</sub> | I <sub>PP</sub> <sup>①</sup> |
|-------------|-------------|----------------|--------------------------------|---------------------------------|--------|----------------|---------------------------------|------------------------------|
| Uni-Polar   | Bi-Polar    | V              | μA                             | min(V)                          | max(V) | mA             | max(V)                          | A                            |
| S-SMBJ5.0A  | S-SMBJ5.0CA | 5.0            | 300                            | 6.40                            | 7.00   | 10             | 9.2                             | 65.2                         |
| S-SMBJ6.0A  | S-SMBJ6.0CA | 6.0            | 150                            | 6.67                            | 7.37   | 10             | 10.3                            | 58.3                         |
| S-SMBJ6.5A  | S-SMBJ6.5CA | 6.5            | 100                            | 7.22                            | 7.98   | 10             | 11.2                            | 53.6                         |
| S-SMBJ7.0A  | S-SMBJ7.0CA | 7.0            | 50                             | 7.78                            | 8.60   | 10             | 12.0                            | 50.0                         |
| S-SMBJ7.5A  | S-SMBJ7.5CA | 7.5            | 50                             | 8.33                            | 9.21   | 1              | 12.9                            | 46.5                         |
| S-SMBJ8.0A  | S-SMBJ8.0CA | 8.0            | 35                             | 8.89                            | 9.83   | 1              | 13.6                            | 44.1                         |
| S-SMBJ8.5A  | S-SMBJ8.5CA | 8.5            | 10                             | 9.44                            | 10.40  | 1              | 14.4                            | 41.7                         |
| S-SMBJ9.0A  | S-SMBJ9.0CA | 9.0            | 5                              | 10.00                           | 11.10  | 1              | 15.4                            | 39.0                         |
| S-SMBJ10A   | S-SMBJ10CA  | 10             | 2                              | 11.10                           | 12.30  | 1              | 17.0                            | 35.3                         |
| S-SMBJ11A   | S-SMBJ11CA  | 11             | 2                              | 12.20                           | 13.50  | 1              | 18.2                            | 33.0                         |
| S-SMBJ12A   | S-SMBJ12CA  | 12             | 1                              | 13.30                           | 14.70  | 1              | 19.9                            | 30.2                         |
| S-SMBJ13A   | S-SMBJ13CA  | 13             | 1                              | 14.40                           | 15.90  | 1              | 21.5                            | 27.9                         |
| S-SMBJ14A   | S-SMBJ14CA  | 14             | 1                              | 15.60                           | 17.20  | 1              | 23.2                            | 25.9                         |
| S-SMBJ15A   | S-SMBJ15CA  | 15             | 1                              | 16.70                           | 18.50  | 1              | 24.4                            | 24.6                         |
| S-SMBJ16A   | S-SMBJ16CA  | 16             | 1                              | 17.80                           | 19.70  | 1              | 26.0                            | 23.1                         |
| S-SMBJ17A   | S-SMBJ17CA  | 17             | 1                              | 18.90                           | 20.90  | 1              | 27.6                            | 21.8                         |
| S-SMBJ18A   | S-SMBJ18CA  | 18             | 1                              | 20.00                           | 22.10  | 1              | 29.2                            | 20.6                         |
| S-SMBJ20A   | S-SMBJ20CA  | 20             | 1                              | 22.20                           | 24.50  | 1              | 32.4                            | 18.6                         |
| S-SMBJ22A   | S-SMBJ22CA  | 22             | 1                              | 24.40                           | 26.90  | 1              | 35.5                            | 16.9                         |
| S-SMBJ24A   | S-SMBJ24CA  | 24             | 1                              | 26.70                           | 29.50  | 1              | 38.9                            | 15.4                         |
| S-SMBJ26A   | S-SMBJ26CA  | 26             | 1                              | 28.90                           | 31.90  | 1              | 42.1                            | 14.3                         |
| S-SMBJ28A   | S-SMBJ28CA  | 28             | 1                              | 31.10                           | 34.40  | 1              | 45.4                            | 13.2                         |
| S-SMBJ30A   | S-SMBJ30CA  | 30             | 1                              | 33.30                           | 36.80  | 1              | 48.4                            | 12.4                         |
| S-SMBJ33A   | S-SMBJ33CA  | 33             | 1                              | 36.70                           | 40.60  | 1              | 53.3                            | 11.3                         |
| S-SMBJ36A   | S-SMBJ36CA  | 36             | 1                              | 40.00                           | 44.20  | 1              | 58.1                            | 10.4                         |
| S-SMBJ40A   | S-SMBJ40CA  | 40             | 1                              | 44.40                           | 49.10  | 1              | 64.5                            | 9.3                          |
| S-SMBJ43A   | S-SMBJ43CA  | 43             | 1                              | 47.80                           | 52.80  | 1              | 69.4                            | 8.7                          |
| S-SMBJ45A   | S-SMBJ45CA  | 45             | 1                              | 50.00                           | 55.30  | 1              | 72.7                            | 8.3                          |
| S-SMBJ48A   | S-SMBJ48CA  | 48             | 1                              | 53.30                           | 58.90  | 1              | 77.4                            | 7.8                          |
| S-SMBJ51A   | S-SMBJ51CA  | 51             | 1                              | 56.70                           | 62.70  | 1              | 82.4                            | 7.3                          |

### ELECTRICAL CHARACTERISTICS ( $T_A=25^{\circ}\text{C}$ , continued)

| Part Number |             | $V_R$ | $I_R@V_R$     | $V_{BR}@I_T$ |        | $I_T$ | $V_C@I_{PP}$ | $I_{PP}^{①}$ |
|-------------|-------------|-------|---------------|--------------|--------|-------|--------------|--------------|
| Uni-Polar   | Bi-Polar    | V     | $\mu\text{A}$ | min(V)       | max(V) | mA    | max(V)       | A            |
| S-SMBJ54A   | S-SMBJ54CA  | 54    | 1             | 60.00        | 66.30  | 1     | 87.1         | 6.9          |
| S-SMBJ58A   | S-SMBJ58CA  | 58    | 1             | 64.40        | 71.20  | 1     | 93.6         | 6.4          |
| S-SMBJ60A   | S-SMBJ60CA  | 60    | 1             | 66.70        | 73.70  | 1     | 96.8         | 6.2          |
| S-SMBJ64A   | S-SMBJ64CA  | 64    | 1             | 71.10        | 78.60  | 1     | 103.0        | 5.8          |
| S-SMBJ70A   | S-SMBJ70CA  | 70    | 1             | 77.80        | 86.00  | 1     | 113.0        | 5.3          |
| S-SMBJ75A   | S-SMBJ75CA  | 75    | 1             | 83.30        | 92.10  | 1     | 121.0        | 5.0          |
| S-SMBJ78A   | S-SMBJ78CA  | 78    | 1             | 86.70        | 95.80  | 1     | 126.0        | 4.8          |
| S-SMBJ85A   | S-SMBJ85CA  | 85    | 1             | 94.40        | 104.0  | 1     | 137.0        | 4.4          |
| S-SMBJ90A   | S-SMBJ90CA  | 90    | 1             | 100.0        | 111.0  | 1     | 146.0        | 4.1          |
| S-SMBJ100A  | S-SMBJ100CA | 100   | 1             | 111.0        | 123.0  | 1     | 162.0        | 3.7          |
| S-SMBJ110A  | S-SMBJ110CA | 110   | 1             | 122.0        | 135.0  | 1     | 177.0        | 3.4          |
| S-SMBJ120A  | S-SMBJ120CA | 120   | 1             | 133.0        | 147.0  | 1     | 193.0        | 3.1          |
| S-SMBJ130A  | S-SMBJ130CA | 130   | 1             | 144.0        | 159.0  | 1     | 209.0        | 2.9          |
| S-SMBJ150A  | S-SMBJ150CA | 150   | 1             | 167.0        | 185.0  | 1     | 243.0        | 2.5          |
| S-SMBJ160A  | S-SMBJ160CA | 160   | 1             | 178.0        | 197.0  | 1     | 259.0        | 2.3          |
| S-SMBJ170A  | S-SMBJ170CA | 170   | 1             | 189.0        | 209.0  | 1     | 275.0        | 2.2          |
| S-SMBJ180A  | S-SMBJ180CA | 180   | 1             | 201.0        | 222.0  | 1     | 292.0        | 2.1          |
| S-SMBJ190A  | S-SMBJ190CA | 190   | 1             | 211.0        | 234.0  | 1     | 307.0        | 2.0          |
| S-SMBJ200A  | S-SMBJ200CA | 200   | 1             | 224.0        | 247.0  | 1     | 324.0        | 1.9          |
| S-SMBJ210A  | S-SMBJ210CA | 210   | 1             | 233.0        | 258.0  | 1     | 337.0        | 1.8          |
| S-SMBJ220A  | S-SMBJ220CA | 220   | 1             | 246.0        | 272.0  | 1     | 356.0        | 1.7          |
| S-SMBJ250A  | S-SMBJ250CA | 250   | 1             | 279.0        | 309.0  | 1     | 405.0        | 1.5          |
| S-SMBJ300A  | S-SMBJ300CA | 300   | 1             | 335.0        | 371.0  | 1     | 486.0        | 1.3          |
| S-SMBJ350A  | S-SMBJ350CA | 350   | 1             | 391.0        | 432.0  | 1     | 567.0        | 1.1          |
| S-SMBJ400A  | S-SMBJ400CA | 400   | 1             | 447.0        | 494.0  | 1     | 648.0        | 0.9          |
| S-SMBJ440A  | S-SMBJ440CA | 440   | 1             | 492.0        | 543.0  | 1     | 713.0        | 0.8          |

① Surge waveform: 10/1000 $\mu\text{s}$


$V_R$  : Stand-off Voltage -- Maximum voltage that can be applied

$V_{BR}$ : Breakdown Voltage

$V_C$ : Clamping Voltage -- Peak voltage measured across the suppressor at a specified  $I_{pp}$


$I_R$ : Reverse Leakage Current

## ORDERING INFORMATION

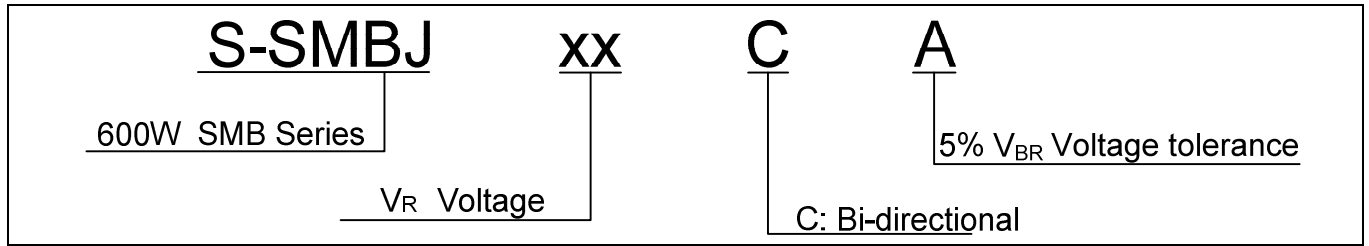


## RATINGS AND V-I CHARACTERISTICS CURVES ( $T_A=25^\circ\text{C}$ , unless otherwise noted)


**FIG.1: V- I curve characteristics (Uni-directional)**

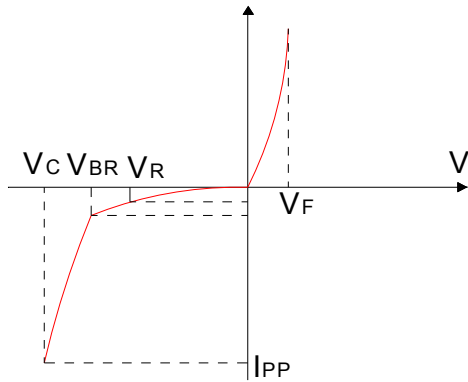


**FIG.2: V- I curve characteristics (Bi-directional)**

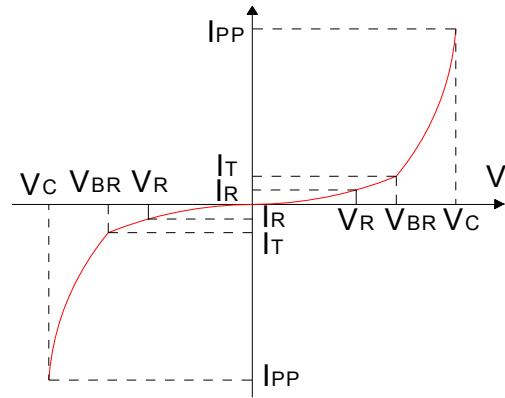

**FIG.3: Pulse waveform**

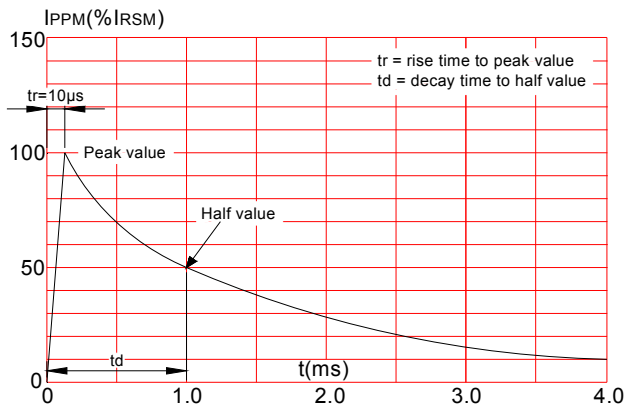


**FIG.4: Pulse derating curve**

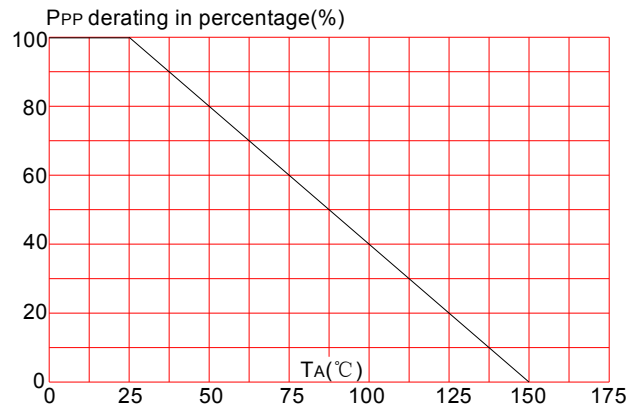


### SOLDERING PARAMETERS

|   |                                   |                                 |
|---|-----------------------------------|---------------------------------|
| Reflow Condition  |                                   | Pb-Free assembly<br>(see FIG.5) |
| Pre Heat  | -Temperature Min ( $T_{s(min)}$ ) | +150°C                          |
|   | -Temperature Max( $T_{s(max)}$ )  | +200°C                          |
|   | -Time (Min to Max) ( $t_s$ )      | 60-180 secs.                    |
| Average ramp up rate (Liquid us Temp ( $T_L$ ) to peak) |                                   | 3°C/sec. Max                    |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                    |                                   | 3°C/sec. Max                    |
| Reflow  | -Temperature( $T_L$ )(Liquid us)  | +217°C                          |
|   | -Temperature( $t_L$ )             | 60-150 secs.                    |
| Peak Temp ( $T_p$ )                                     |                                   | +260(+0/-5)°C                   |
| Time within 5°C of actual Peak Temp ( $t_p$ )           |                                   | 30 secs. Max                    |
| Ramp-down Rate  |                                   | 6°C/sec. Max                    |
| Time 25°C to Peak Temp ( $T_p$ )                        |                                   | 8 min. Max                      |
| Do not exceed   |                                   | +260°C                          |

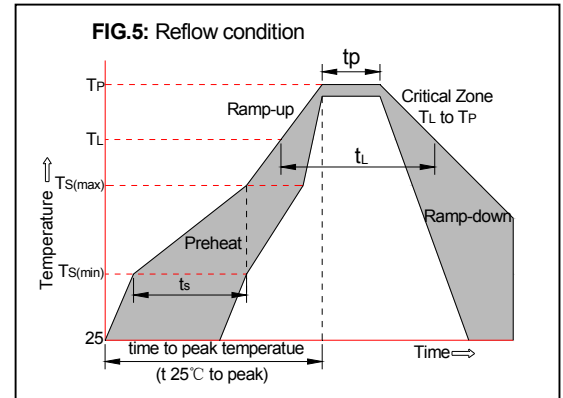


### PACKAGE MECHANICAL DATA

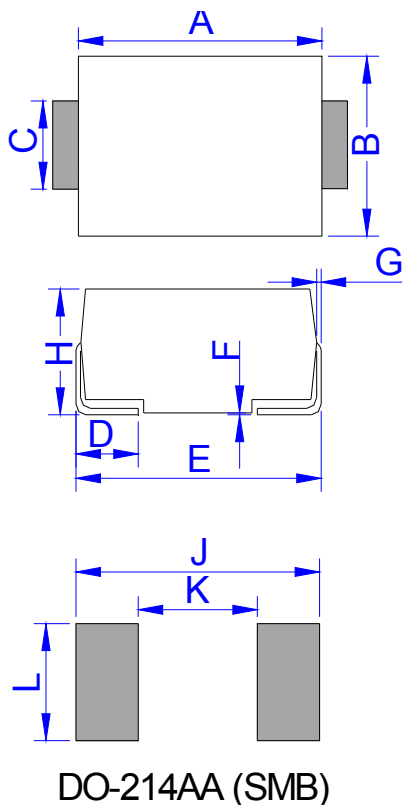

| Ref. | Dimensions  |       |        |       |
|------|-------------|-------|--------|-------|
|      | Millimeters |       | Inches |       |
|      | Min.        | Max.  | Min.   | Max.  |
| A    | 4.25        | 4.75  | 0.167  | 0.187 |
| B    | 3.30        | 3.94  | 0.130  | 0.155 |
| C    | 1.85        | 2.21  | 0.073  | 0.087 |
| D    | 0.76        | 1.52  | 0.030  | 0.060 |
| E    | 5.08        | 5.59  | 0.200  | 0.220 |
| F    | 0.051       | 0.203 | 0.002  | 0.008 |
| G    | 0.15        | 0.31  | 0.006  | 0.012 |
| H    | 2.11        | 2.44  | 0.083  | 0.096 |
| J    | 6.80        |       | 0.270  |       |
| K    |             | 2.60  |        | 0.100 |
| L    | 2.40        |       | 0.090  |       |

### TAPE AND REEL SPECIFICATION-SMB

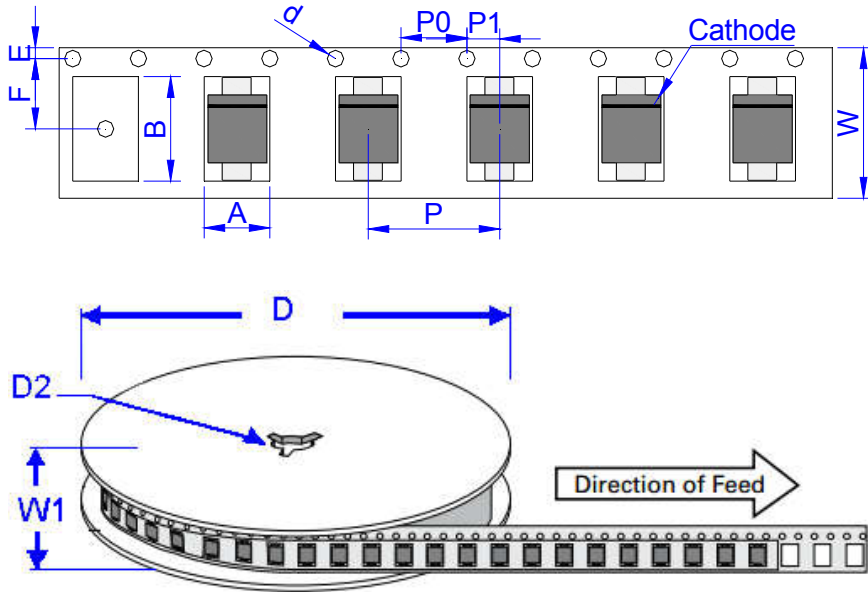

| Ref. | Dimensions     |                   |
|------|----------------|-------------------|
|      | Millimeters    | Inches            |
| A    | $3.76 \pm 0.2$ | $0.144 \pm 0.012$ |
| B    | $5.69 \pm 0.2$ | $0.244 \pm 0.012$ |
| d    | $1.5 \pm 0.25$ | $0.059 \pm 0.004$ |
| D    | 330.0          | 13.0              |
| D2   | $13 \pm 1$     | $0.512 \pm 0.039$ |
| E    | $1.75 \pm 0.2$ | $0.059 \pm 0.008$ |
| F    | $5.5 \pm 0.1$  | $0.222 \pm 0.008$ |
| P    | $8.0 \pm 0.2$  | $0.315 \pm 0.008$ |
| P0   | $4.0 \pm 0.2$  | $0.157 \pm 0.008$ |
| P1   | $2.0 \pm 0.2$  | $0.079 \pm 0.008$ |
| W    | $12.0 \pm 0.3$ | $0.472 \pm 0.008$ |
| W1   | $16.8 \pm 2.0$ | $0.661 \pm 0.079$ |

| OUTLINE | REEL (PCS) | PER CARTON (PCS) | REEL DIAMETERS (mm) |
|---------|------------|------------------|---------------------|
| TAPING  | 3,000      | 48,000           | 330                 |

#### NOTICE

Leiditech reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Leiditech does not assume any liability arising out of the application or use of any product described herein.

Shanghai Leiditech Electronic Co., Ltd  
 Email: sale1@leiditech.com  
 Tel : +86- 021 50828806  
 Fax : +86- 021 50477059